

Squircle NFC Tag

A how-to guide for applying the Squircle self adhesive NFC tag to metal or plastic.

Where to apply

Use in well-protected, low-impact areas. Avoid placing on edges, corners, or areas that can take knocks.

If using on devices, pulleys, or other hardware, do not place in a proud area. If tagging these items, consider using the Carabiner/Hardware tag or Rope Tag instead.



How to apply


- Ensure the surface you are applying the tag to is clean, dry and flat
- The tag is self-adhesive: peel the tag from the backing paper and stick in place, pressing down firmly
- Leave the tag to cure for 24 hours to ensure a strong adhesive bond
- If using the Squircle on a round surface like cable or shackles, apply adhesive-lined heat-shrink over the tag
- If using the Squircle for soft goods, apply a layer between the Squircle and the webbing or other soft surface



✓ Well-protected



✓ Heatshrink over round surface

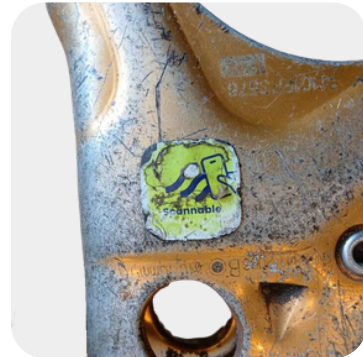

✗ Proud area prone to knocks or wear

- Do**
- Use on metal or plastic (not helmets)
 - Apply in a well-protected area
 - Apply heat shrink over the tag if placed on round items like cables or shackles
 - Add a protective layer between the Squircle and soft goods

- Don't**
- Skip surface prep: dirt, oil, and uneven surfaces reduce adhesion
 - Place on edges, corners, or areas that can take knocks
 - Place on helmets

This tag works well on equipment like:

Anchor Strops, Shackles, Maillon Rapides, many power tools like Makita, DeWalt, Milwaukee, Sithl, Husqvarna

